

1. Machine configuration and overall dimensions



Shotmaster c/Classic Tempest



Shotmaster c/Classic Earth

Technical data	
Brew chamber	2 x 24 g
Grinder	2 x Steel burrs - 64 mm
User Interface	1 x Touch screen 256 mm (10.1")
Bean hopper	2 x 1.5 kg
Coffee outlet height*	190 mm max.
Hot water outlet height*	160 mm max. or 215 mm max. (option)
Interface	2 x USB, 1 x Ethernet, 1 x CCI/CSI
Cup heater surface	-
Coffee boiler size	2 x 1.5 L
Steam boiler size	-
Grounds drawer	1 x 700 g
Drip tray	Standard
Water Connection	
Water hose	Inox braided pipe G3/8" female x 2 m
Drain hose	Ø 22 mm x Ø 16 mm x 2 m

*measured from the drip tray

Classic	Shotmaster c
Weight	60 kg
Performance (up to)	
Espresso/h (23 s)	350
Hot water/h (200 ml)	170
Cappuccino/h (23 s)	-
Adjustable hot water temperature (Manual)	-
Adjustable hot water temperature (Automatic)	-
e'Foam Micro Air Dosing (MAD) system (controlled electronically)	-
Milk system with EMT (Electronic Milk Texturing)	-
Voltage/Power	
Power consumption (standby mode)	Less than 2 W
2/PE, 208V~, 60Hz, 30A	4600 W
Water pressure and flow	
2.5 - 4 bars (36.3 - 58 psi) If the pressure exceeds 4 bars (58 psi), it is necessary to install a pressure valve reducer.	
To avoid damage to the water pump, a water flow rate of at least 150 l/h (2.5 l/min) must be ensured at the water inlet of the machine.	



2. Prior to the installation READ SAFETY INSTRUCTIONS


- Check water quality and pressure
- Define filter type and size and check space inside counter
- If no descaling cartridge is used, install carbon filter as minimum
- Check that the machine is on flat and stable surface
- Check counter cut out
- Check water supply installation
- Check that power supply conforms to local standards
- Check that power supply conforms to the machine settings
- Check that the machine is the only device on this power line
- Check all with customer on site
- Make sure original coffee is available
- Check drink recipes and cup sizes

3. After installation

- Explain cleaning and instruct staff using Quick Reference Card (QRC). Download here: <https://bit.ly/2VY008Q>.
- Save the machine data to an USB stick and send it to data-upload@eversys.com. Refer to: <https://bit.ly/3yTzsWo>.

4. Desk preparation and countertop cut out dimensions

- Download the pre-commissioning requirements check list here: <https://bit.ly/3CQ4zop>.
- Download the 1:1 scale countertop cutout here: <https://bit.ly/3xT5TMM>.

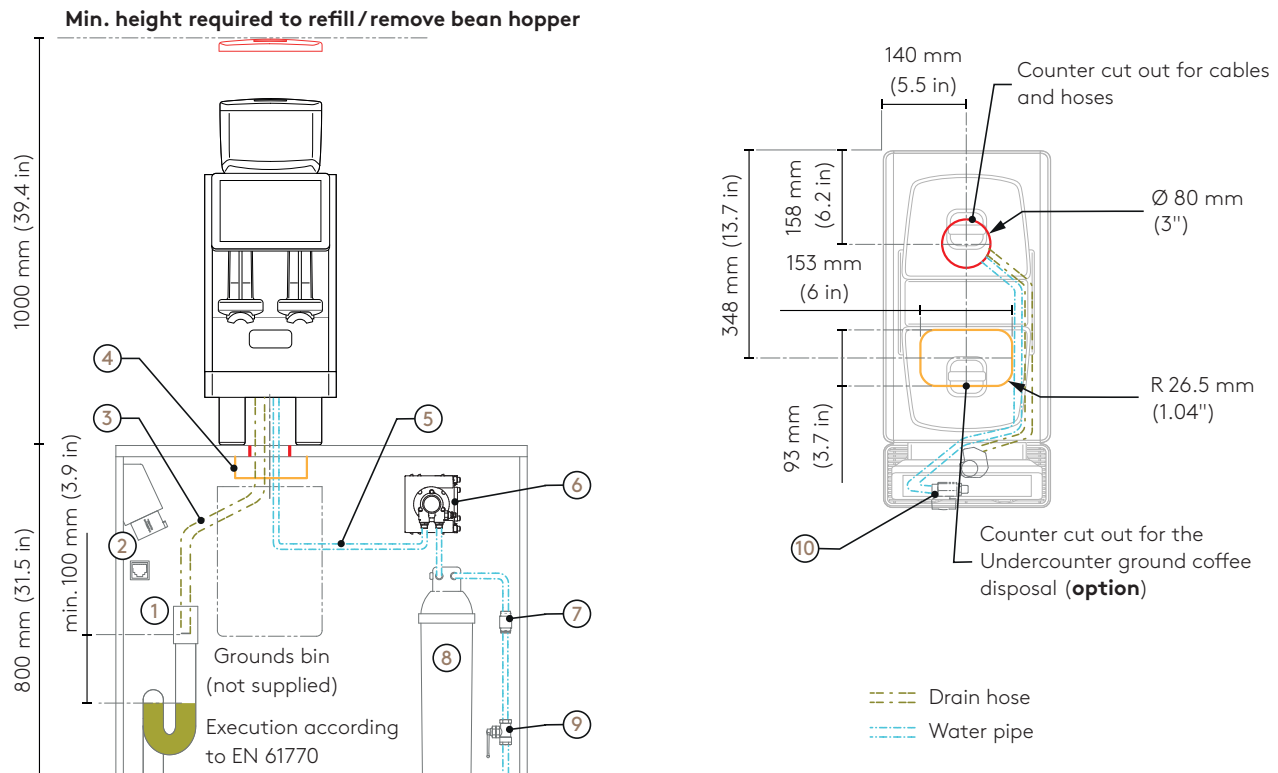

1. Drain with siphon, input min. Ø 56 mm.
2. Electrical socket according to local regulation and RJ-45 connection (e'Connect).
3. Drain hose - **Make sure that there is no dip or any back pressure in the hose. The hose must always flow downwards.**
4. Undercounter ground coffee disposal (option).
5. Main water braided pipe.
6. External water pump.
7. Check valve according to local regulation.
8. Descaling cartridge or carbon filter as minimum.
9. Pressure reducer output - Only if water pressure exceeds 4 bars (58 psi).
10. Water inlet 3/8".

 Refer to the commissioning manual (<https://bit.ly/3D4FuGm>) for more information.

Water quality recommendation

Total hardness: 5 - 8° dGH (89-142 ppm)
 Carbonate hardness: Max. 6° dKH (107 ppm)
 pH value: ideal 7.0 - 7.2

Your local distributor: